
## 2 Axle Flatbed Semi Trailer

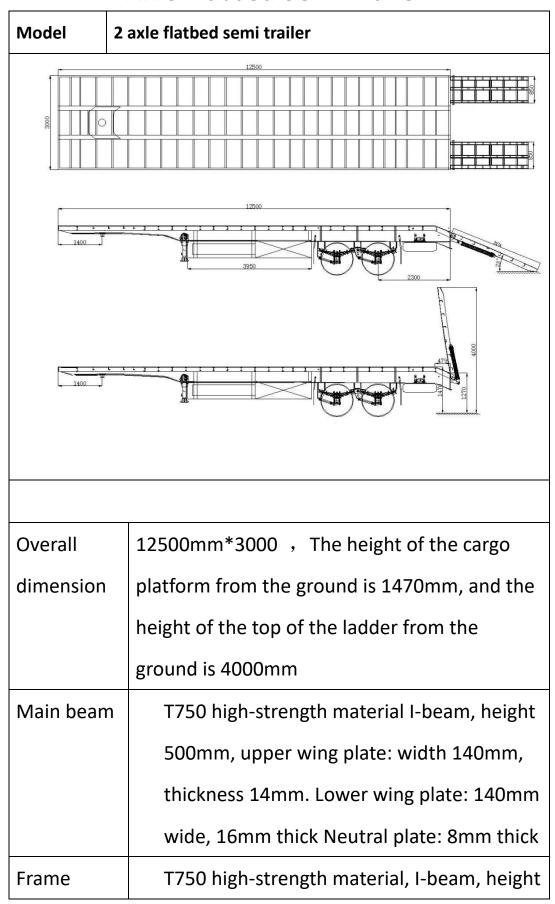

beam	230mm, upper wing plate: 90mm wide,
	8mm thick. Lower wing plate: 90mm wide,
	6mm thick Neutral plate: 6mm thick
Platform	4mm Checker plate
Payload	35000kg
Suspension	Thickened suspension
King pin	50# JOST Movable
Ladding	28T Single action external device, YAHUA
gear	
Toolbox	Standard/ One
Accessory	A set of dedicated on-board tools
Rust	Powerful sandblasting and rust removal for the
removal	entire vehicle, including slag removal,
	polishing, and gluing
Paint	Whole vehicle powder coating/(color
	according to requirements)
Rim	9 pcs
Tire	11PR22.5/ 9pcs
Ladder	Mechanical ladder
Axle	2*13T16P, Fuhua
Leaf spring	10 standard leaf springs with a width of 9mm
Gas storage	3 aluminum alloy gas storage tanks

tank	
Line	National standard pure copper cable
Lamps and	24v Sugeya LED
lanterns	
Spare Track	One